

### Reserve Studies | Insurance Appraisals | Wind Mitigation

### COMMERCIAL WINDSTORM MITIGATION REPORT

Fareham Square Condominium Association, Inc.



Prepared Exclusively for Fareham Square Condominium Association, Inc.

As of 7/22/2019 FPAT File# MIT1911527

FELTEN PROFESSIONAL ADJUSTMENT TEAM
866.568.7853
www.FPATadjusters.com | info@FPATadjusters.com



### **CERTIFICATION OF WINDSTORM MITIGATION AFFIDAVIT(S)**

This is to certify the enclosed Windstorm Mitigation Inspection report prepared for Fareham Square Condominium Association, Inc. is the result of work performed by Felten Professional Adjustment Team, LLC. and one or more of the individuals listed below.

In addition, we certify that, to the best of our knowledge and belief:

- All facts contained in this report are true and accurate.
- FPAT has no present or prospective interest in the subject property of this report, and also has no personal interest with respect to the parties involved.
- FPAT has no bias with respect to the subject property of this report or to the parties involved with this assignment.
- Our engagement in this assignment was not contingent upon producing or reporting predetermined results.
- Our compensation is not contingent on any action or event resulting from this report.
- ➤ We have the knowledge and experience to generate accurate windstorm mitigation affidavit(s) for insurance purposes on all buildings contained within this report.
- We have performed a physical inspection of the subject risk(s) contained in this report.
- > This report meets or exceeds the standards of the Citizens Inspection Outreach Program.

John Felten

Ian Wright

Sr. Adjuster # D075772

Flood Certification # 05030007

### **Key Staff:**

### Phillip E. Franco

**Brad Felten** 

General Adjuster # D003413
Flood Certification # 03010346
Certified Appraiser
Certified Construction Inspector, ACI, CCI #7140

Sr. Adjuster # E149535 Flood Certification # 06060373 Certified Wind & Hurricane Mitigation Inspector


Sr. Adjuster # W273704 Certified Wind & Hurricane Mitigation Inspector

Certified Building Contractor # CBC1255984

Certified Wind & Hurricane Mitigation Inspector



### **AERIAL MAPS OF PROPERTY**

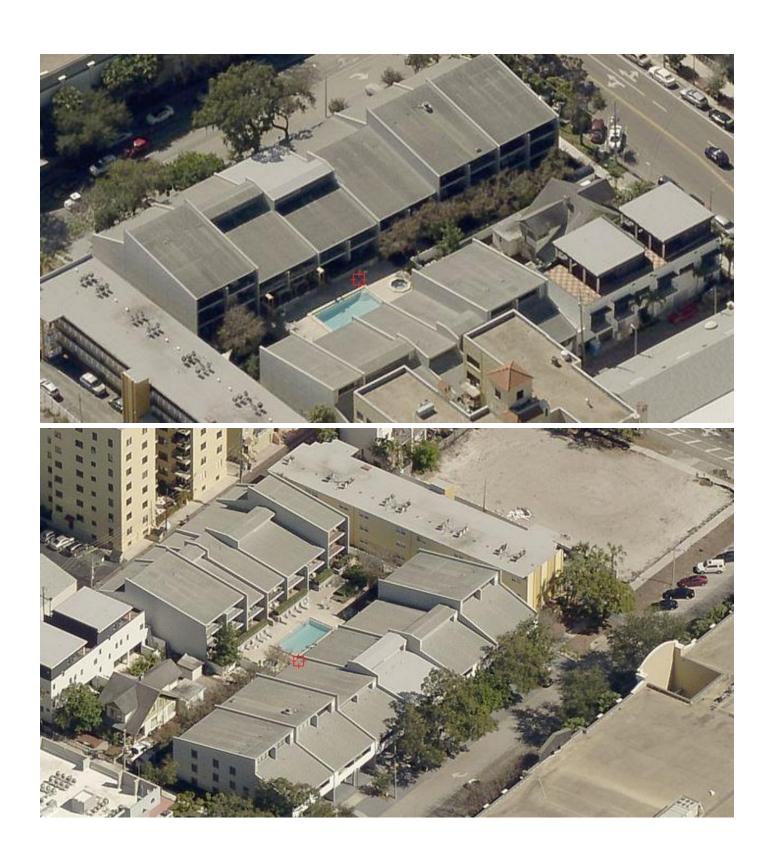



### OIR-B1-1802 RECAPITULATION OF BUILDING MITIGATION FEATURES

Fareham Square Condominium Association, Inc.

Building	Roof Covering	Roof Deck Attachment	Roof-Wall Attachment	Roof Shape	SWR	Opening Protection
301 2nd St N, Building A, Units 1-7	FBC Equivalent	No Attic Access	No Attic Access	Other Roof	•	None or Some Glazed Openings
301 2nd St N, Building B, Units 8- 19	FBC Equivalent	No Attic Access	No Attic Access	Other Roof	•	None or Some Glazed Openings



### Felten Professional Adjustment



Reserve Studies | Insurance Appraisals | Wind Mitigation

### COMMERCIAL WINDSTORM MITIGATION REPORT (OIR-B1-1802)

Fareham Square Condominium Association, Inc. 301 2nd St N, Building A, Units 1-7 St. Petersburg, FL 33701



As of 7/22/2019 FPAT File# MIT1911527

FELTEN PROFESSIONAL ADJUSTMENT TEAM 866.568.7853
www.FPATadjusters.com | info@FPATadjusters.com



SUPPORTING DOCUMENTION OF WINDSTORM MITIGATION FEATURES FPAT File #MIT1911527 LOCATED AT: 301 2nd St N, Building A, Units 1-7

# **RECAPITULATION OF MITIGATION FEATURES**For 301 2nd St N, Building A, Units 1-7

1. Building Code: Unknown or does not meet the requirements of Answer A or B

Comments: The year of construction was verified as 1982 per Pinellas County

Property Appraiser.

2. Roof Covering: FBC Equivalent

Comments: The roof covering was replaced in 2006. The roof permit was

confirmed and the permit number is 06-4000775 This roof was verified as meeting the building code requirements outlined on the

mitigation affidavit.

3. Roof Deck Attachment: No Attic Access

Comments: Due to no attic access we were unable to determine the Roof Deck

Attachment.

4. Roof to Wall No Attic Access

**Attachment:** 

Comments: Due to no attic access we were unable to determine the Roof to Wall

Attachment.

5. Roof Geometry: Other Roof

Comments: Inspection verified a gable roof shape.

6. SWR: Unknown or Undetermined

Comments: Due to no attic access we were unable to verify SWR.

7. **Opening Protection:** None or Some Glazed Openings

Comments: No opening protection verified at the time of inspection.



**Address Verification** 



**Exterior Elevation** 



## SUPPORTING DOCUMENTION OF WINDSTORM MITIGATION FEATURES FPAT File #MIT1911527 LOCATED AT: 301 2nd St N, Building A, Units 1-7



**Roof Construction** 



### **Uniform Mitigation Verification Inspection Form**

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 7/22/2019					
Owner Information					
Owner Name: Fareham Square Condominium Association, Inc.  Contact Person: Jenny Kidd					
Address: 301 2nd St N, Building A, Uni	ts 1-7	Home Phone:			
City: St. Petersburg	Zip: 33701	Work Phone: (727) 726-8000			
County: Pinellas		Cell Phone:			
Insurance Company:		Policy #:			
Year of Home: 1982	# of Stories: 3	Email:			

Year of Home: 1982	# of Stories:	: 3	Email:	
NOTE: Any documentation used in vaccompany this form. At least one pl though 7. The insurer may ask addit	otograph must ac	company this form	to validate each attribute m	arked in questions 3
<ol> <li>Building Code: Was the structure to the HVHZ (Miami-Dade or Broward)</li> <li>A. Built in compliance with the FBC 3/1/2002: Building Permit Appl</li> <li>B. For the HVHZ Only: Built in comprovide a permit application with [X] C. Unknown or does not meet the result of the structure of the st</li></ol>	d counties), South In the Year Built. For illustration Date (MM/DD/Appliance with the SI the date after 9/1/1	Florida Building Co homes built in 2002 YYYY) FBC-94: Year Built 994: Building Perm	de (SFBC-94)?  2003 provide a permit applica  For homes built in 1	994, 1995, and 1996
<ol> <li>Roof Covering: Select all roof cove OR Year of Original Installation/Re covering identified.</li> </ol>				
2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	Provided for Compliance
<ul> <li>[X] 1. Asphalt/Fiberglass Shingle</li> <li>[] 2. Concrete/Clay Tile</li> <li>[] 3. Metal</li> <li>[] 4. Built Up</li> <li>[] 5. Membrane</li> <li>[] 6. Other</li> </ul>	4/17/2006			0 0 0 0 0
<ul> <li>[X] A. All roof coverings listed above installation OR have a roofing</li> <li>[] B. All roof coverings have a Miamipermit application after 9/1/19</li> <li>[] C. One or more roof coverings do not D. No roof coverings meet the requirements.</li> </ul>	permit application Dade Product App 94 and before 3/1/2 of meet the requires	date on or after 3/1/ roval listing current 2002 OR the roof is onents of Answer "A	02 OR the roof is original and at time of installation OR (for original and built in 1997 or la	built in 2004 or later. the HVHZ only) a roofing
3. Roof Deck Attachment: What is the [] A. Plywood/Oriented strand board (staples or 6d nails spaced at 6" a -OR- Any system of screws, not uplift less than that required for [] B. Plywood/OSB roof sheathing we 24"inches o.c.) by 8d common other deck fastening system or a maximum of 12 inches in the [] C. Plywood/OSB roof sheathing we have a fastening system.	(OSB) roof sheathin long the edge and 1 ails, adhesives, othe Options B or C belief a minimum thin nails spaced a maximus/rafter spacing field or has a mean	ng attached to the ro 2" in the fieldOR- er deck fastening sy low. ckness of 7/16" inches imum of 12" inches that is shown to have a uplift resistance of	pof truss/rafter (spaced a maxing Batten decking supporting wowstem or truss/rafter spacing that attached to the roof truss/rafter in the fieldOR- Any system we an equivalent or greater residual least 103 psf.	od shakes or wood shingles, hat has an equivalent mean fter (spaced a maximum of of screws, nails, adhesives, istance than 8d nails spaced
[] C. Plywood/OSB roof sheathing w 24"inches o.c.) by 8d common decking with a minimum of 2 n	nails spaced a max	imum of 6" inches i	in the fieldOR- Dimensiona	l lumber/Tongue & Groove

decking with a minimum of 2 nails per board (or 1 nail per board if each board is equal to or less than 6 inches in width). -OR-Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

### **FPAT File #MIT1911527**

or greater resist 182 psf.	tance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at leas
D. Reinforced Conc	rete Roof Deck.
[] E. Other: [] F. Unknown or unid	entified.
[X] G. No attic access.	
	<b>hment:</b> What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within or outside corner of the roof in determination of WEAKEST type)
[] Tru top pl	ass/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the late of the wall, or
[] Me	tal connectors that do not meet the minimal conditions or requirements of B, C, or D
	s to qualify for categories B, C, or D. All visible metal connectors are:
	ured to truss/rafter with a minimum of three (3) nails, <b>and</b> uched to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter <b>and</b> blocked no more than 1.5" of the truss/rafter, <b>and</b> free of visible severe corrosion
[] B. Clips	
[] Me	tal connectors that do not wrap over the top of the truss/rafter, <b>or</b> tal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nai on requirements of C or D, but is secured with a minimum of 3 nails.
[] C. Single Wraps	•
	Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
[] D. Double Wraps	•
	tal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a
minin [] Me	num of 2 nails on the front side, and a minimum of 1 nail on the opposing side, <b>or</b> tal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on sides, and is secured to the top plate with a minimum of three nails on each side.
	r bolts structurally connected or reinforced concrete roof.
F. Other:	
[] G. Unknown or unid [X] H. No attic access	lentified
	That is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of ver unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
[] A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter.
[] B. Flat Roof	Total length of non-hip features: ; Total roof system perimeter: Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12: sq ft; Total roof area: sq ft
[X] C. Other Roof	Any roof that does not qualify as either (A) or (B) above.
6 Secondary Water I	Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR)
[] A. SWR (also called sheathing or fo	I Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling rusion in the event of roof covering loss.
[] B. No SWR.	
[X] C. Unknown or un	determined.

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart			Glazed O	Non-Glazed Openings			
Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.		Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure						
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
	Opening Protection products that appear to be A or B but are not verified						
N	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection						

- [] A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
  - Miami-Dade County PA 201, 202, and 203
  - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
  - American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
  - Southern Standards Technical Document (SSTD) 12
  - For Skylights Only: ASTM E 1886 and ASTM E 1996
  - For Garage Doors Only: ANSI/DASMA 115
- □ A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist
   □ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
   □ A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
   □ B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
   ASTM E 1886 and ASTM E 1996 (Large Missile 4.5 lb.)
   SSTD 12 (Large Missile 4 lb. to 8 lb.)
- are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):

  ASTM E 1886 and ASTM E 1996 (Large Missile 4.5 lb.)

  SSTD 12 (Large Missile 4 lb. to 8 lb.)

  For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile 2 to 4.5 lb.)

  B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist

  B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above

  B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above

  C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 (Level C in the table above).

  C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist

  C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above

  C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

FP	ΔT	Fil	l۵	#1	ИIT	Г1 С	11	1527

[] N. Exterior Opening Protection (unverified shutter syst								
protective coverings not meeting the requirements of "B" with no documentation of compliance (Level N is		r systems	that appear to meet Answer "A" or					
☐ N.1 All Non-Glazed openings classified as Level A, B, C, or	N.1 All Non-Glazed openings classified as Level A, B, C, or N in the table above, or no Non-Glazed openings exist							
N.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level X in the table above								
☐ N.3 One or More Non-Glazed openings is classified as Level								
[X] X. None or Some Glazed Openings One or more Glazed of	openings classified and Lev	el X in th	ne table above.					
MITIGATION INSPECTIONS MUST B Section 627.711(2), Florida Statutes, provi	~							
Qualified Inspector Name: John Felten	License Type: CBC		License or Certificate #: CBC1255984					
Inspection Company: Felten Professional Adjustment Te	eam, LLC.	Phone:	866-568-7853					
Qualified Inspector – I hold an active license as a:	(check one)							
Home inspector licensed under Section 468.8314, Florida Statutes training approved by the Construction Industry Licensing Board a			er of hours of hurricane mitigation					
<ul> <li>☐ Building code inspector certified under Section 468.607, Florida S</li> <li>☐ General, building or residential contractor licensed under Section</li> </ul>								
Professional engineer licensed under Section 471.015, Florida Statutes.								
Professional architect licensed under Section 481.213, Florida Statutes.								
Any other individual or entity recognized by the insurer as posses verification form pursuant to Section 627.711(2), Florida Statutes		ns to prop	erly complete a uniform mitigation					
Individuals other than licensed contractors licensed under S								
under Section 471.015, Florida Statues, must inspect the stru								
<u>Licensees under s.471.015 or s.489.111 may authorize a dire</u> experience to conduct a mitigation verification inspection.	<u>ct employee who possesse</u>	s tne req	uisite skiii, knowledge, and					
I, John Felten am a qualified inspector and I	narganally narformed the	inspecti	on on Giagnard					
contractors and professional engineers only) I had my employand I agree to be responsible for his/her work.								
, , , , , , ,								
R. A.								
Qualified Inspector Signature:Date	e: <u>7/22/2019</u>							
An individual on satisfy sub-a language of the satisfy such assessment		<b></b>	4:4:4:					
An individual or entity who knowingly or through gross neg is subject to investigation by the Florida Division of Insuran								
appropriate licensing agency or to criminal prosecution. (Se	ction 627.711(4)-(7), Flori	ida Statu	tes) The Qualified Inspector who					
certifies this form shall be directly liable for the misconduct	of employees as if the aut	horized 1	mitigation inspector personally					
performed the inspection.								
Homeowner to complete: I certify that the named Qualified residence identified on this form and that proof of identification								
Signature: D	ate:							
	-							
An individual or entity who knowingly provides or utters a	false or fraudulent mitigat	ion verif	ication form with the intent to					
obtain or receive a discount on an insurance premium to wh								
of the first degree. (Section 627.711(7), Florida Statutes)								
The definitions on this form are for inspection purposes only and cannot be hurricanes.	e used to certify any product or	constructio	n feature as offering protection from					

\*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

Inspectors Initials Property Address 301 2nd St N, Building A, Units 1-7, St. Petersburg

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

### Felten Professional Adjustment



### Reserve Studies | Insurance Appraisals | Wind Mitigation

### COMMERCIAL WINDSTORM MITIGATION REPORT (OIR-B1-1802)

Fareham Square Condominium Association, Inc. 301 2nd St N, Building B, Units 8-19 St. Petersburg, FL 33701



As of 7/22/2019 FPAT File# MIT1911527

FELTEN PROFESSIONAL ADJUSTMENT TEAM
866.568.7853
www.FPATadjusters.com | info@FPATadjusters.com



SUPPORTING DOCUMENTION OF WINDSTORM MITIGATION FEATURES FPAT File #MIT1911527 LOCATED AT: 301 2nd St N, Building B, Units 8-19

# **RECAPITULATION OF MITIGATION FEATURES**For 301 2nd St N, Building B, Units 8-19

1. Building Code: Unknown or does not meet the requirements of Answer A or B

Comments: The year of construction was verified as 1982 per Pinellas County

Property Appraiser.

2. Roof Covering: FBC Equivalent

Comments: The roof covering was replaced in 2006. The roof permit was

confirmed and the permit number is 06-4000776 This roof was verified as meeting the building code requirements outlined on the

mitigation affidavit.

3. Roof Deck Attachment: No Attic Access

Comments: Due to no attic access we were unable to determine the Roof Deck

Attachment.

4. Roof to Wall No Attic Access

**Attachment:** 

Comments: Due to no attic access we were unable to determine the Roof to Wall

Attachment.

5. Roof Geometry: Other Roof

Comments: Inspection verified a gable roof shape.

6. SWR: Unknown or Undetermined

Comments: Due to no attic access we were unable to verify SWR.

7. **Opening Protection:** None or Some Glazed Openings

Comments: No opening protection verified at the time of inspection.

SUPPORTING DOCUMENTION OF WINDSTORM MITIGATION FEATURES FPAT File #MIT1911527 LOCATED AT: 301 2nd St N, Building B, Units 8-19



Address Verification



**Exterior Elevation** 



### SUPPORTING DOCUMENTION OF WINDSTORM MITIGATION FEATURES FPAT File #MIT1911527 LOCATED AT: 301 2nd St N, Building B, Units 8-19



**Roof Construction** 



### **Uniform Mitigation Verification Inspection Form**

Maintain a copy of this form and any documentation provided with the insurance policy

Inspection Date: 7/22/2019		m provided with the insurance poney				
Owner Information						
Owner Name: Fareham Square Condominium Association, Inc.  Contact Person: Jenny Kidd						
Address: 301 2nd St N, Building B, Units 8	Home Phone:					
City: St. Petersburg	Zip: 33701	Work Phone: (727) 726-8000				
County: Pinellas		Cell Phone:				
Insurance Company:		Policy #:				
Year of Home: 1982	# of Stories: 3	Email:				

msurance company.			1 oney n.	
Year of Home: 1982 # of Stories: 3 Email:				
NOTE: Any documentation used in valida accompany this form. At least one photog though 7. The insurer may ask additional	raph must accompany t	his form to validate	each attribute marke	d in questions 3
<ol> <li>Building Code: Was the structure built in the HVHZ (Miami-Dade or Broward council of the HVHZ (Mia</li></ol>	nties), South Florida Built Built For homes built Date (MM/DD/YYYY) ce with the SFBC-94: Yeate after 9/1/1994: Buildi	ding Code (SFBC-94 t in 2002/2003 provice ear Built Fo ng Permit Applicatio	4)? de a permit application or homes built in 1994,	with a date after
2. <u>Roof Covering:</u> Select all roof covering to OR Year of Original Installation/Replace covering identified.				ance for each roof
2.1 Roof Covering Type:	rmit Application FBC or N Date Product Ap		iginal Installation or eplacement	No Information Provided for Compliance
[X] 1. Asphalt/Fiberglass Shingle  [] 2. Concrete/Clay Tile  [] 3. Metal  [] 4. Built Up  [] 5. Membrane  [] 6. Other	4/17/2006			0 0 0 0 0
<ul> <li>[X] A. All roof coverings listed above meet installation OR have a roofing perm</li> <li>[] B. All roof coverings have a Miami-Dade permit application after 9/1/1994 an</li> <li>[] C. One or more roof coverings do not mee</li> <li>[] D. No roof coverings meet the requirement</li> </ul>	it application date on or a Product Approval listing d before 3/1/2002 OR the et the requirements of An	after 3/1/02 OR the rog g current at time of in e roof is original and aswer "A" or "B".	oof is original and built stallation OR (for the I	in 2004 or later.
3. Roof Deck Attachment: What is the week  [] A. Plywood/Oriented strand board (OSB staples or 6d nails spaced at 6" along to the control of	o roof sheathing attached he edge and 12" in the fie dhesives, other deck fast ons B or C below. minimum thickness of 7 spaced a maximum of 12 after spacing that is shown has a mean uplift resisminimum thickness of 7 spaced a maximum of 6" spaced a maximum of 6"	to the roof truss/rafted. OR-Batten decking system or trust/16" inch attached to inches in the field. It is tance of at least 103 of 10" inches in the field. It is tance of at least 103 of 10" inches in the field. It is tance of at least 103 of 10" inches in the field.	ing supporting wood shad sayrafter spacing that had the roof truss/rafter (second to the roof truss/rafter (second to the roof truss/rafter (second truss/ra	akes or wood shingles.  as an equivalent mean  spaced a maximum of  rews, nails, adhesives,  te than 8d nails spaced  spaced a maximum of  ber/Tongue & Groove

Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

### **FPAT File #MIT1911527**

or greating of the second of t	ater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at leas f.
[] D. Reinford	eed Concrete Roof Deck.
[] E. Other:	n or unidentified.
[X] G. No att	
5 feet of the	all Attachment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within in inside or outside corner of the roof in determination of WEAKEST type)
[] A. Toe Nai	[] Truss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the
	top plate of the wall, or [] Metal connectors that do not meet the minimal conditions or requirements of B, C, or D
Minimal co	onditions to qualify for categories B, C, or D. All visible metal connectors are:
	[]Secured to truss/rafter with a minimum of three (3) nails, <b>and</b> []Attached to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter <b>and</b> blocked no more than 1.5" of the truss/rafter, <b>and</b> free of visible severe corrosion
[] B. Clips	
	[] Metal connectors that do not wrap over the top of the truss/rafter, <b>or</b> [] Metal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nai position requirements of C or D, but is secured with a minimum of 3 nails.
[] C. Single W	
	Metal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
[] D. Double	
	[] Metal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond beam, on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a minimum of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or [] Metal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on both sides, and is secured to the top plate with a minimum of three nails on each side.
[] E. Structura [] F. Other:	al Anchor bolts structurally connected or reinforced concrete roof.
	n or unidentified
[X] H. No att	
	netry: What is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of acture over unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
[] A. Hip Roo	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter.  Total length of non-hip features: ; Total roof system perimeter:
[] B. Flat Roo	
[X] C. Other	
[] A. SWR (all sheath from v	Water Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) so called Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the sing or foam adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling water intrusion in the event of roof covering loss.
-	

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. Opening Protection: What is the weakest form of wind borne debris protection installed on the structure? First, use the table to determine the weakest form of protection for each category of opening. Second, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings and (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

Opening Protection Level Chart			Glazed O	Non-Glazed Openings			
Place an "X" in each row to identify all forms of protection in use for each opening type. Check only one answer below (A thru X), based on the weakest form of protection (lowest row) for any of the Glazed openings and indicate the weakest form of protection (lowest row) for Non-Glazed openings.			Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure						
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
	Opening Protection products that appear to be A or B but are not verified						
N	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection						

- [] A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
  - Miami-Dade County PA 201, 202, and 203
  - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
  - American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
  - Southern Standards Technical Document (SSTD) 12
  - For Skylights Only: ASTM E 1886 and ASTM E 1996
  - For Garage Doors Only: ANSI/DASMA 115
- A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist ☐ A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above ☐ A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above [] B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above): ASTM E 1886 and ASTM E 1996 (Large Missile - 4.5 lb.) SSTD 12 (Large Missile – 4 lb. to 8 lb.)
- For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile 2 to 4.5 lb.) ☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist ☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above [] C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007 All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above). ☐ C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above ☐ C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

<sup>\*</sup>This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

FPAT File #MIT19115	ľ Fi	le	#1	Иľ	1'1 C	<b>}11</b>	52.7
---------------------	------	----	----	----	-------	------------	------

[] N. Exterior Opening Protection (unverified shutter syst			
protective coverings not meeting the requirements of Answer "A", "B", or C" or systems that appear to meet Answer "A" or "B" with no documentation of compliance (Level N in the table above).			
N.1 All Non-Glazed openings classified as Level A, B, C, or N in the table above, or no Non-Glazed openings exist			
N.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level X in the table above			
☐ N.3 One or More Non-Glazed openings is classified as Level X in the table above			
[X] X. None or Some Glazed Openings One or more Glazed openings classified and Level X in the table above.			
MITIGATION INSPECTIONS MUST BE CERTIFIED BY A QUALIFIED INSPECTOR. Section 627.711(2), Florida Statutes, provides a listing of individuals who may sign this form.			
Qualified Inspector Name: John Felten	License Type: CBC	Lie	ense or Certificate #: CBC1255984
Inspection Company: Felten Professional Adjustment Te	eam, LLC.	LLC. Phone: 866-568-7853	
Qualified Inspector – I hold an active license as a: (check one)			
Home inspector licensed under Section 468.8314, Florida Statutes who has completed the statutory number of hours of hurricane mitigation training approved by the Construction Industry Licensing Board and completion of a proficiency exam.			
<ul> <li>□ Building code inspector certified under Section 468.607, Florida Statutes.</li> <li>□ General, building or residential contractor licensed under Section 489.111, Florida Statutes.</li> </ul>			
Professional engineer licensed under Section 471.015, Florida Statutes.			
□ Professional architect licensed under Section 481.213, Florida Statutes.			
Any other individual or entity recognized by the insurer as possessing the necessary qualifications to properly complete a uniform mitigation verification form pursuant to Section 627.711(2), Florida Statutes.			
Individuals other than licensed contractors licensed under Section 489.111, Florida Statutes, or professional engineer licensed under Section 471.015, Florida Statues, must inspect the structures personally and not through employees or other persons.  Licensees under s.471.015 or s.489.111 may authorize a direct employee who possesses the requisite skill, knowledge, and experience to conduct a mitigation verification inspection.  I, am a qualified inspector and I personally performed the inspection or (licensed)			
contractors and professional engineers only) I had my employee ( <u>James Sheets</u> ) perform the inspection and I agree to be responsible for his/her work.			
RATE OF THE PROPERTY OF THE PR			
Qualified Inspector Signature:Date: 7/22/2019			
An individual or entity who knowingly or through gross negligence provides a false or fraudulent mitigation verification form is subject to investigation by the Florida Division of Insurance Fraud and may be subject to administrative action by the appropriate licensing agency or to criminal prosecution. (Section 627.711(4)-(7), Florida Statutes) The Qualified Inspector who certifies this form shall be directly liable for the misconduct of employees as if the authorized mitigation inspector personally performed the inspection.			
Homeowner to complete: I certify that the named Qualified Inspector or his or her employee did perform an inspection of the residence identified on this form and that proof of identification was provided to me or my Authorized Representative.			
Signature:D	Pate:		-
An individual or entity who knowingly provides or utters a false or fraudulent mitigation verification form with the intent to obtain or receive a discount on an insurance premium to which the individual or entity is not entitled commits a misdemeanor of the first degree. (Section 627.711(7), Florida Statutes)			
The definitions on this form are for inspection purposes only and cannot be hurricanes.	e used to certify any product or o	construction fe	ature as offering protection from

\*This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.